

## LED Floodlight

Very lightweight, compact and streamline design. Universal mounting bracket allows wall or surface mounting with the possibility of tilting upwards or downwards. Pre-wired with 30 cm long mains cable and open cable ends with 1mm<sup>2</sup> cross section.


Glass: Tempered glass

Reflector: Aluminium


Cover: Aluminum die-cast

Mounting bracket: Aluminum die-cast

Weight: 0.85 kg

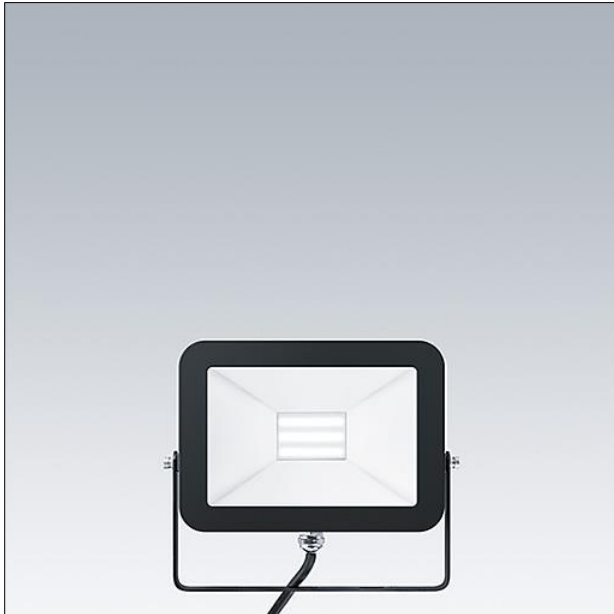


TE\_ALICE\_F\_180.jpg

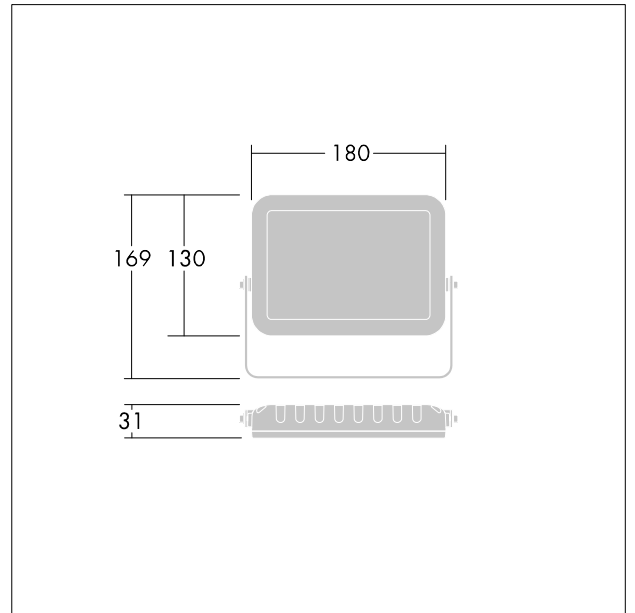

TE\_ALIC\_M\_30W\_LD.wmf

## Light Distribution

STD - standard

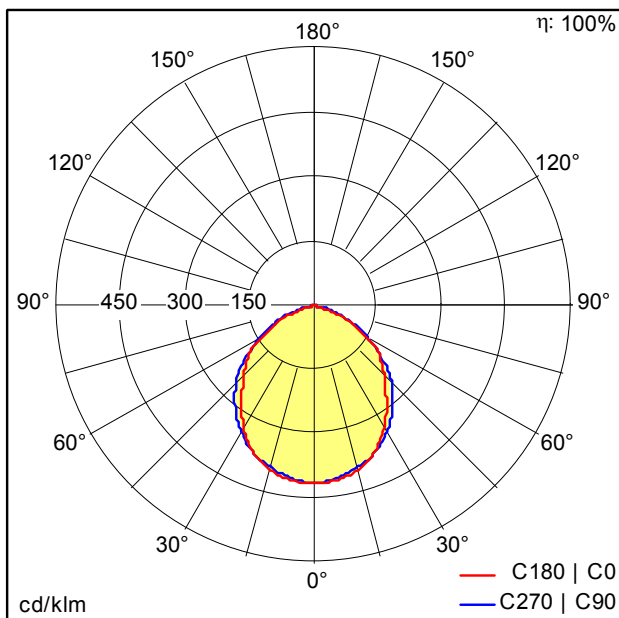

TE\_ALICE\_LED\_FL\_IP65\_20W\_840.idt

- Light Source: LED
- Luminaire luminous flux\*: 1602 lm
- Luminaire efficacy\*: 80 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 6
- Rated median useful life\*:  
L70 35000h at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 20 W Power factor = 0.5
- Dimming: Fixed output

All values marked with an \* are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.